


## ТЕХНИЧЕСКИЕ ДАННЫЕ ПРОДУКТА

### Effetto 1 narrow beam + 1 large beam - 4000K - Light grey

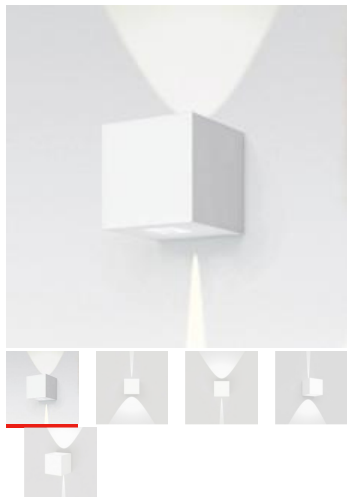

#### ДИЗАЙН:

Artemide  
2011

#### МАТЕРИАЛЫ:

Die-cast aluminium, reinforced polymer, PMMA

#### ОПИСАНИЕ:

Light fixture with 2 light beams using monochromatic LED light sources characterized by neutral colour temperature (4000K) together with light-diffusing lenses which optimize the optical performance of the beams and establish their width. Designed to create geometric lights of scenic effect, it has 1 narrow beam of 15° and 1 large beam of 90°. Wall installation.

Composed by lighting cap unit and terminal board fixed together by means of locking dowels. Cap in die-cast EN AB-47100 aluminium. Terminal board in reinforced polymer. Watertight gasket in silicone rubber. Locking dowels used outside the fixture in AISI 316 stainless steel. PMMA lenses siliconed flush with the cap to obtain the beam angle opening.

Wiring to be carried out inside the terminal board by piercing an IP65 membrane grommet suitable for cables with a diameter of 6-13 mm. Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Effective power 5,4W.

#### ВЫБРАТЬ

LED

Light grey

#### КОД ПРОДУКТА

T4201NLN00

#### Вид светового потока




IP65

#### ТЕХНИЧЕСКИЕ ДАННЫЕ

##### ХАРАКТЕРИСТИКИ

Наименование продукции: Effetto 1 narrow beam + 1 large beam - 4000K - Light grey  
Код: T4201NLN00  
Цвет: Light grey  
Материал: Die-cast aluminium, reinforced polymer, PMMA  
Серии: Outdoor  
Окружающая среда: Уличное место контракта: Городская архитектура, Фасады зданий, Частные резиденции

##### РАЗМЕРЫ



##### ЦВЕТ



##### ОПТИКА

Вид светового потока: Indirect

##### РАЗМЕРЫ

Длина: cm 14  
Ширина: cm 14  
Высота: cm 14  
Ударопрочность: IK10  
тест раскаленной проволокой: 650 °

##### ЛАМПЫ ВКЛЮЧЕНЫ В КОМПЛЕКТ

Категория: LED  
Ватт: 7W  
Световой поток (lm): 380lm  
Количество: 1 x 2  
Типология: 1  
Цветовая температура (K): 4000K  
Класс: A

##### LUMINAIR

ПРА: Electronic Integrated  
Watt: 7W  
Напряжение: 220V-240V


##### Установка





ДИАГРАММЫ


Polar curve - narrow beam 15°

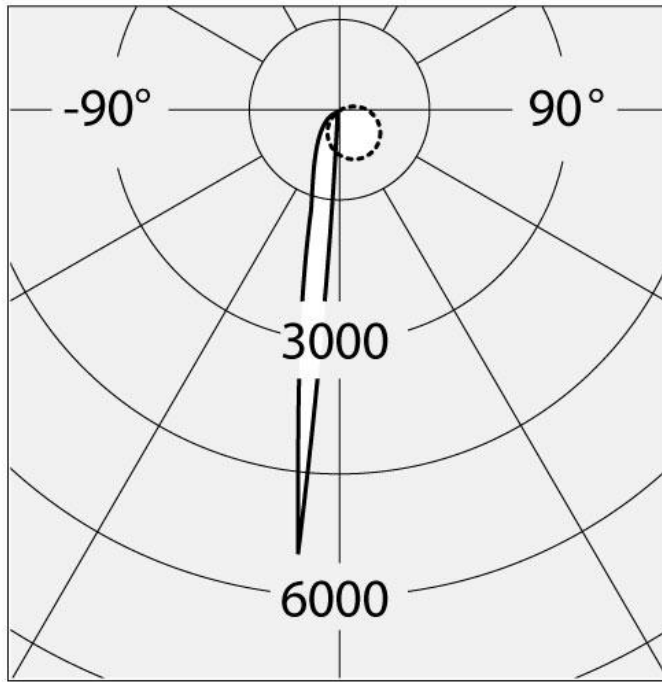

—— C=0°-180° Cd/Klm

· · · · · C=90°-270°

**Polar curve - large beam 90°**

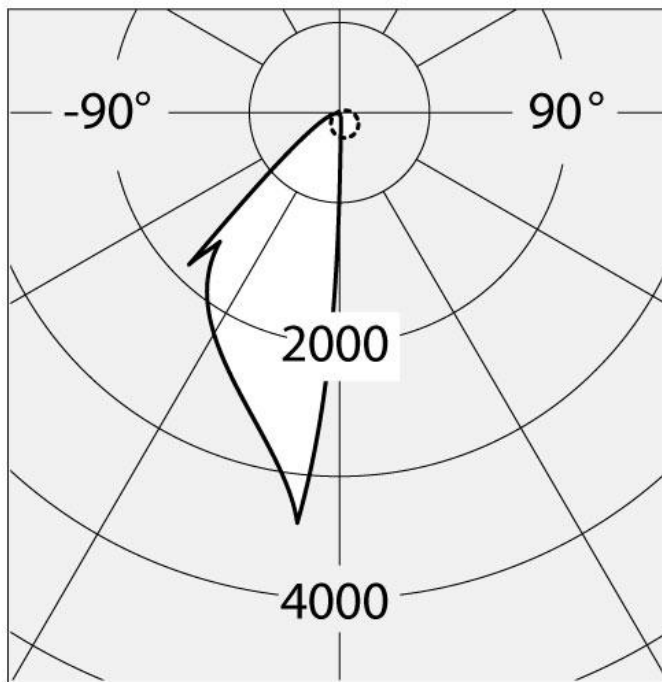

—— C=0°-180° Cd/Klm

· · · · · C=90°-270°

**Fasci luminosi > 1x15° + 1x90°**

