

ТЕХНИЧЕСКИЕ ДАННЫЕ ПРОДУКТА

Riga IP65 80 3000K



ДИЗАЙН:

Nord Light
2005

МАТЕРИАЛЫ:

transparent polycarbonate

ОПИСАНИЕ:

Light fixture with high-performance LED light sources.
Floor, wall, ceiling installation by means of fixing clips.
Monochromatic or RGB light.
Body in UV resistant transparent polycarbonate.
Electrical connection to the ballast by means of 100cm-long two-pole cable FROR BLU with IP68 quick-release terminal board supplied.
24Vdc remote ballast.
Polycarbonate stoppers.
Body fastened to the recessing box by means of proper pre-stressed steel springs to be ordered separately.
Technical features of light fixtures in compliance with EN60598-1.
Installation must be carried out by specialized personnel. Carefully follow the instructions.

White monochromatic LEDS

Colour temperatures:
Warm = 3000K

ВЫБРАТЬ

LED

Trasparent White

КОД ПРОДУКТА

NL17401VTK0

Вид светового потока



IP65

Dimmable

ТЕХНИЧЕСКИЕ ДАННЫЕ

ХАРАКТЕРИСТИКИ

Наименование продукции: Riga IP65 80 3000K
Код: NL17401VTK0
Цвет: Trasparent White
Материал: transparent polycarbonate
Серии: Nord Light, Outdoor
место контракта: Гостеприимство
Гостиницы, Фасады
зданий

РАЗМЕРЫ

Длина: cm 78
Ширина: cm 1
Высота: cm 1
Вес: kg 0.1


ЛАМПЫ ВКЛЮЧЕНЫ В КОМПЛЕКТ

Категория: LED
Ватт: 3 W
Световой поток (lm): 188 lm
Типология: 1
Цветовая температура (K): 3000 K
Класс: A

LUMINAIR

ПРА: Electronic supplied
separately
Watt: 3 W
Напряжение: 24Vdc

РАЗМЕРЫ

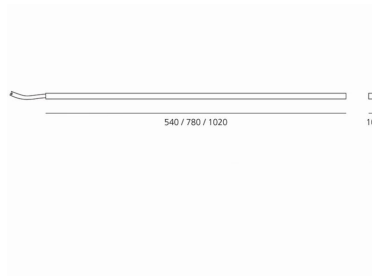

ЦВЕТ





ALIMENT. 40W 24Vdc IP67
NL62040



ALIMENT. 70W 24Vdc IP67
NL89080



ALIMENT. 150W 24Vdc IP67
NL62880