

ТЕХНИЧЕСКИЕ ДАННЫЕ ПРОДУКТА

Riga IP65 60 4000K

**ДИЗАЙН:**

Nord Light
2005

МАТЕРИАЛЫ:

transparent polycarbonate

ОПИСАНИЕ:

Light fixture with high-performance LED light sources.
Floor, wall, ceiling installation by means of fixing clips.
Body in UV resistant transparent polycarbonate.
Electrical connection to the ballast by means of 100cm-long two-pole cable FROR BLU with IP68 quick-release terminal board supplied.
24Vdc remote ballast.
Polycarbonate stoppers.
Body fastened to the recessing box by means of proper pre-stressed steel springs to be ordered separately.
Technical features of light fixtures in compliance with EN60598-1.
Installation must be carried out by specialized personnel. Carefully follow the instructions.

White monochromatic LEDs

Colour temperatures:
Neutral = 4000K

ВЫБРАТЬ

LED

Trasparent White

КОД ПРОДУКТА

NL17405VTW0

Вид светового потока

IP40  

Dimmable

ТЕХНИЧЕСКИЕ ДАННЫЕ**ХАРАКТЕРИСТИКИ**

Наименование продукции: Riga IP65 60 4000K
Код: NL17405VTW0
Цвет: Trasparent White
Материал: transparent polycarbonate
Серии: Nord Light, Outdoor
место контракта: Гостеприимство
Гостиницы, Фасады
зданий

РАЗМЕРЫ

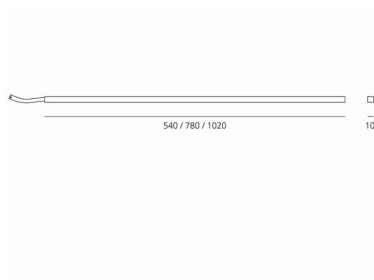
Длина: cm 78
Ширина: cm 1
Высота: cm 1
Вес: kg 0.1

ЛАМПЫ ВКЛЮЧЕНЫ В КОМПЛЕКТ

Категория: LED
Ватт: 3W
Мощность (каждый): 20mA
Количество: 1 x 36
Типология: 1
Цветовая температура (К): 4000K
Класс: A
Напряжение: 24Vdc

LUMINAIR

ПРА: Electronic supplied
separately
Watt: 3 W
Напряжение: 24Vdc

РАЗМЕРЫ**ЦВЕТ**



ALIMENT. 40W 24Vdc IP67
NL62040



ALIMENT. 70W 24Vdc IP67
NL89080



ALIMENT. 150W 24Vdc IP67
NL62880