

serie/series

lako

LED

powered by
Seoul® Semiconductor 2525
AC direct connection
220/240V
Transformer not required

simmetrico
symmetric
symétriques
simétrico
symmetrisch

example code:

	art.	LED	colour
409.018	L7H	X1	oxi
	art.	LED	colour
409.018	L7H	X2	nhg

art.
409

designers **Marco Bertoli**
& **Uff. Tecnico Landa**




409.040



dettagli / details / details
detalles / details: **p.69**



409.018**L7HX1**



409.018**L7HX2**




corpo alluminio pressofuso
e estruso
body in die casting and
extruded aluminium
corps en aluminium moulé
sous pression et extrudé
cuerpo aluminio inyectado y
extrusionado
Körper aus Aluminium-
Druckguss

diffusore policarbonato opale
diffuser opal polycarbonate
diffuser polycarbonate opale
difusor policarbonato ópalo
Diffuser Polykarbonat opal

FOR TECHNICAL DETAILS VISIT
www.landa.it

IP65


COLOURS



nhg

oxi

BASE DIMENSIONS

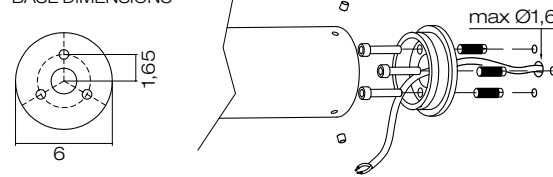

ELECTRIFICATION

LED

dettagli / details / details
detalles / details:
p.A54 - A55

Energy efficiency classes

L7HX1
LED 7 W
3000K
600LM
Ra80



A++ ÷ A

L7HX2
LED 7 W
3000K
600LM
Ra80



A++ ÷ A

Included:



code **0404M009**
Single connection IP68

lako

Projectors

Recessed

Contemporary

Traditional

CONTEMPORARY



ENERGY
SAVING

57

