

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.


LANDA[®]
illuminotecnica

Brick Light




Article 414F26
Product type wall recessed
Body material Die-casting aluminium EN46100, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation. Ring in die-casting aluminium EN46100
Opal Polycarbonate diffuser and silicon gasket.
Screws in A2 stainless steel
Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.
Electronic ballast included

IK07
IP65

G24q-3 26W 240W Fluorescent

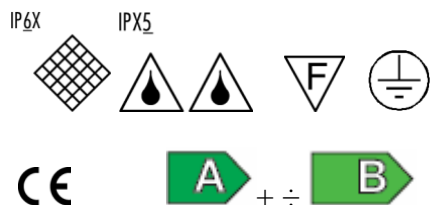

Colours available:

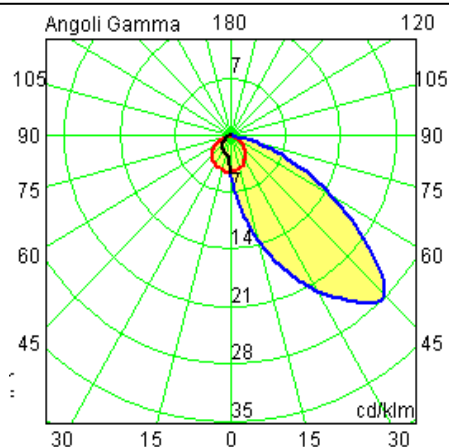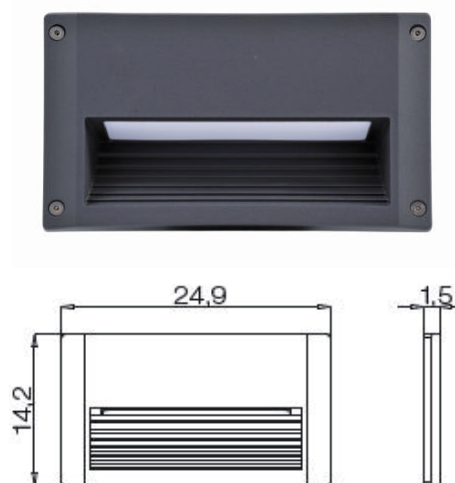

Accessory included:

