

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA[®]
illuminotecnica

Brick Light

Article 414L12H

Product type wall recessed

Body material

Die-casting aluminium EN46100, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation. Ring in die-casting aluminium EN46100

Opal Polycarbonate diffuser and silicon gasket.

Screws in A2 stainless steel

Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.

220-240V AC Transformer LED MEANWELL LPC20 30V 700mA IP67 included

IK07

IP65

LED Citizen Electronics CLL130

12W 220/240V transformer included

414L12H 3000°K 1220 LM Ra80

Dimmable: NO

IP6X

IPX5



CE



++ ÷



Colours available:

Graphite




nhg

Metalgrey



all

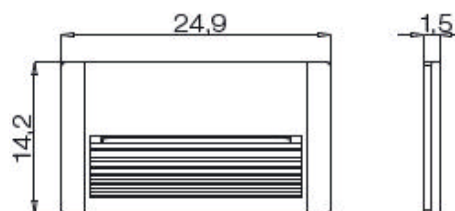

Accessory included:

