
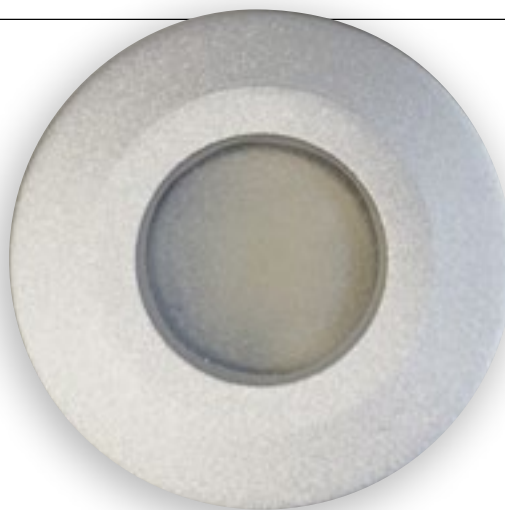


serie/series  
**wall  
 mira 45**

**LED**  
 powered by  
 Seoul® Semiconductor Z5M

example code:  
 | art. | LED |  | anodized |  
 4151 | L2 | H | inx





art.  
**4151**  
**4152**  
**4153**  
**4154**



design Ufficio Tecnico Landa





corpo alluminio estruso  
 anodizzato  
 body in extruded anodized  
 aluminium  
 corps en aluminium  
 extrudé anodisé  
 cuerpo en aluminio  
 extrusionado y anodizado  
 Körper aus eloxiertem  
 fließgepresst Aluminium

diffusore vetro opale  
 diffuser glass opal  
 diffuser verre opale  
 difusor vidrio ópalo  
 Diffuser Glas opal



FOR TECHNICAL DETAILS VISIT  
[www.landa.it](http://www.landa.it)

IP66

art.	art.		W	V	Type		Ra
4151L2N	4152L2N		2	24	4000K 160LM	80	
4151L2H	4152L2H				3000K 160LM	80	



ELECTRIFICATION



dettagli / details / details  
 detalles / details:  
 p.A54 - A55

Energy efficiency classes

Trasformer available:  
 cod. 0409BT014 to connect up to **5** pieces – GE LIGHTING IP67 24V c.c. 12W  
 cod. 0409BT015 to connect up to **10** pieces – GE LIGHTING IP67 24V c.c. 25W  
 Trasformer on request:  
 cod. 0409BT016 to connect up to **42** pieces – GE LIGHTING IP67 24V c.c. 100W

A++ ÷ A

wall  
mira 45 (24V)


Projectors

NEW

Recessed


Contemporary

Traditional




RECESSED



15



4153




code ....L2




4154



code ....L2



art.	art.		W	V	Type		Ra
4153L2N	4154L2N		2	24	4000K	160LM	80
4153L2H	4154L2H		2	24	3000K	160LM	80



...brz



...inx

Accessories on request:



code 0404M009  
Single connection IP68

