

serie/series

beam

LED

powered by
Citizen Electronics® LED
AC direct connection
220/240V
Transformer not required

simmetrico
symmetric
symétriques
simétrico
symmetrisch


example code:

art. LED 20° colour
456 LS20 H nhg

art.

456

design Ufficio Tecnico Landa



corpo alluminio pressofuso
58 body in die casting aluminium
corps en aluminium moulé
sous pression
cuerpo aluminio inyectado
Körper aus Aluminium-
Druckguss



opale
opal / opale
ópalo / opal

diffusore policarbonato
diffuser polycarbonate
diffuser polycarbonate
difusor policarbonato
Diffuser Polykarbonat



trasparente
transparent
transparent
transparente
klar

art.	W	V	Type	LUX 1mt	Ra
456L10NB	10	220/240	4000K 1006LM	140	80
456L10HB	10	220/240	3000K 945LM	135	80
456L20NB	20	220/240	4000K 2385LM	270	80
456L20HB	20	220/240	3000K 2280LM	260	80
456GX53	13	240V		GX53	

art.	W	V	Type	LUX 1mt	Ra
456LL10N	60° 10	220/240	4000K 1006LM	780	80
456LL10H	60° 10	220/240	3000K 945LM	740	80
456LL20N	60° 20	220/240	4000K 2385LM	1540	80
456LL20H	60° 20	220/240	3000K 2280LM	1460	80

art.	W	V	Type	LUX 1mt	Ra
456LS10N	15° 10	220/240	4000K 1006LM	5300	80
456LS10H	15° 10	220/240	3000K 945LM	5000	80
456LS20N	20° 20	220/240	4000K 2385LM	6580	80
456LS20H	20° 20	220/240	3000K 2280LM	6250	80

FOR TECHNICAL DETAILS VISIT
www.landa.it

IP65


ELECTRIFICATION

LED

dettagli / details / details
detalles / details:
p.A54 - A55

Energy efficiency classes

Transformer not required

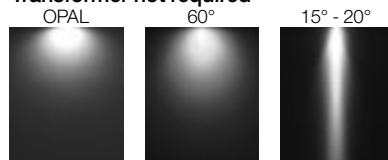


codeL codeLL codeLS

A++ ÷ A

GX53

1 x max 13 W
GX53



A ÷ B

COLOURS
nhg all oxi bgg

beam

Projectors

Recessed

NEW

Contemporary

Traditional

CONTEMPORARY



59



Accessories on request:



code 0404M004
Single connection IP68