

serie/series

lyras 65

LED

powered by
Philips Luxeon H50-2
AC direct connection
220/240V
Transformer not required

simmetrico
symmetric
symétriques
simétrico
symmetrisch

example code:

art.	LED	anodized
4699	L5	H brz

art.
4699

design Ufficio Tecnico Landa

corpo alluminio estruso
anodizzato
body in extruded
aluminium
corps en aluminium extrudé
anodisé
cuerpo en aluminio
extrusionado y anodizado
Körper aus eloxiertem
fließgepresst Aluminium

diffusore vetro trasparente
e opale
diffuser glass transparent
and opal
diffuser verre transparent
et opale
difusor vidrio transparente
y ópalo
Diffuser Glas klar und opal

IK08

FOR TECHNICAL DETAILS VISIT
www.landa.it


IP67



4699 inox



4699 brz



art.	LUX 1mt		art.	LUX 1mt		art.	LUX 1mt		W	V	Type	Ra
4699LS5H	2070	15°	4699LL5H	525	30°	4699L5H	92		5	220-240	3000K 400LM	80


ANODIZED
brz inox

ELECTRIFICATION

LED

dettagli / details / details
detalles / details:
p.A54 - A55

Energy efficiency classes

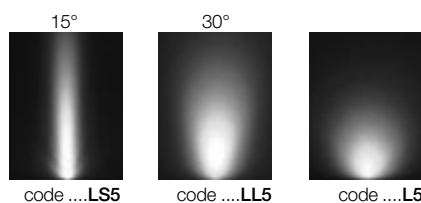

A++ ÷ A

lyras 65 (AC/240V)

Projectors

Recessed

Contemporary

Traditional



7 | PROJECTORS




Thanks to Aric - F

Accessories on request:



code 0404M009
Single connection IP68



code 00A469
Mounting spike

