

LineaLed 12W RGB



ДИЗАЙН:

Carlotta de Bevilacqua
2010

МАТЕРИАЛЫ:

Aluminum

ОПИСАНИЕ:

Light fixture with high-performance LED light sources.
Walk-over and drive-over recessed floor installation.
Walk over and drive over approved up to 5000Kg.
RGB light.
Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection.
Floor recessing box in steel.
Body in extruded EN AW6060 T5 aluminum.
End caps in injection-moulded polycarbonate with silicone gasket.
8mm-thick opal non-slip tempered glass.
Glass surface temperature lower than 35°.
Recessing box for laying in AISI 304 steel, with end caps and accessories for series connection (to be ordered separately).
Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.
Painted profile with 2-stage outdoor treatment: primer, outdoor paint.
RGB version with Full Colour RGB LEDs.
IP Rating IP65-IP67.
Insulation class III.
Technical features of light fixtures in compliance with EN60598-1.
Installation must be carried out by specialized personnel. Carefully follow the instructions.

Remote Led Driver supplied separately.

Maximum n°7 of fixtures per LED driver.

ВЫБРАТЬ

LED

Aluminum.

КОД ПРОДУКТА

NL76490

Вид светового потока



67

ТЕХНИЧЕСКИЕ ДАННЫЕ

ХАРАКТЕРИСТИКИ

Наименование продукции: LineaLed 12W RGB
Код: NL76490
Цвет: Aluminum.
Материал: Aluminum
Серии: Nord Light, Outdoor
место контракта: Городская архитектура

РАЗМЕРЫ

Длина: cm 97.8
Ширина: cm 4.7
Высота: cm 6.5

ЛАМПЫ ВКЛЮЧЕНЫ В КОМПЛЕКТ

Категория: LED
Ватт: 12W P.Max
Количество: 1 x 48 Led
Типология: SMD
Цветовая температура (К): RGB
Класс: A
Напряжение: 24 Vdc

РАЗМЕРЫ



ЦВЕТ




LUMINAIR

ПРА: Driver RGB
 Watt: 12 W
 Напряжение: 24Vdc
 PWM

Установка



Sistemi di controllo RGB

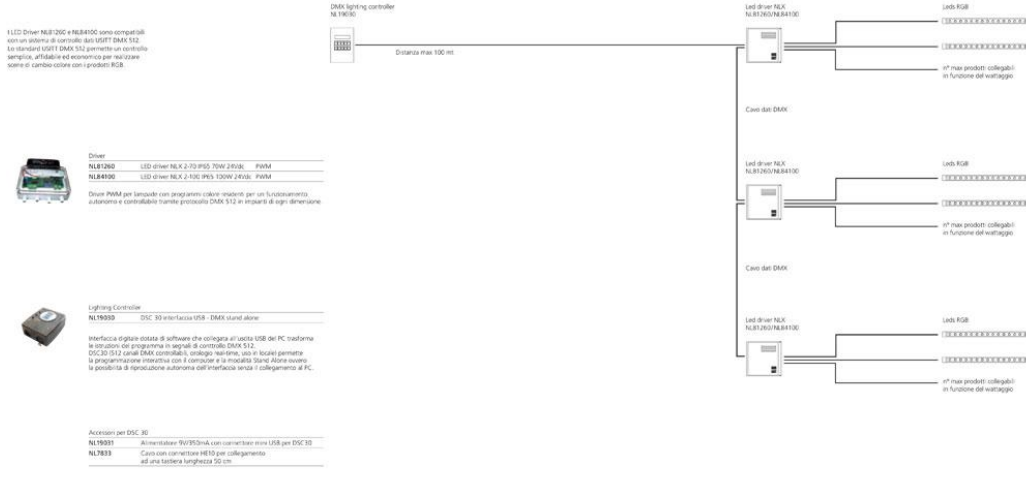

AKCECCYAPЫ



DRIVER LED NLX 2-70 IP65
NL81280



DRIVER LED NLX 2-100 RGB
100W IP65 NL84100



LINEALED C/CASSA 98CM
NL76680



80 x 50 x 1,5mm
staffa di giunzione
continuity joint
LINEALED STAFFA
GIUNZIONE C/CASSA NL75810



LINEALED TESTATA
CASSA(COPPIA) NL74890



CONNETTORE
ALIMENTAZIONE + TAPPO
NL19052



Alimentatore 9V/350mA con
connettore mini USB per
DSC30 NL19031



LED-Driver NLX2-150 IP65
150W 24Vdc PWM NL77720