Artemide

ТЕХНИЧЕСКИЕ ДАННЫЕ ПРОДУКТА

Solar Tree



ДИЗАЙН:


Ross Lovegrove 2007

МАТЕРИАЛЫ:

Aluminium

ОПИСАНИЕ:

Solar Tree is a light fixture combining an innovative design with the technical performances of LED lighting systems using solar energy supplied from a photovoltaic system. This project aims to combine the reduced environmental impact, especially deriving from a low absorption of fossil fuel-based energy, with the need to ensure constant operation and expected light performances. The operation of this light fixture is not influenced by weather randomness and project changes due to winter periods (e.g. number of panels, accumulator dimensioning). These project changes concerning dimensions and weights would imply higher costs, and the fixture would not, nevertheless, ensure continuous working. In fact, hybrid versions are increasingly used in leading sectors. For this reason Artemide has developed the Solar Tree project which, with a mixed configuration of accumulators / solar energy and mains power supply, can combine Energysaving and functionality at the best. Structure consisting of curved steel poles of different diameters and heights, with a maximum total height of about 5,5m over road level. This system consisting of 10 "stems of grass" with 40mm Ø. 1 LED approximately about 1 W protected by a diffuser screen in PETG and 10 poles with 76mm \varnothing supporting the heads. The poles are painted with outdoor epoxy paint in a light green colour shading into white. The 10 heads, housing the photovoltaic cells in their upper part are supported by poles with a diameter of 76mm; 20 power LEDs, which can be supplied with power up to 500mA and have a white neutral colour temperature, are housed in the lower part of 4 of them, on an aluminium dissipator. They are provided with a screen in plastic material which ensures protection against water and dusts. The base is made of hot-galvanised steel plate to be fixed to the ground. Otherwise it is possible to use a base, always in galvanised steel, with reinforced concrete parts forming a circular bench. In this case the base can rest on the ground without the need of further fixing systems. The connection/wiring parts, the control and recharge boards and the batteries are contained in several watertight boxes, provided with male and female connectors with IP Rating IP65 or higher, placed at the foot of the base or inside the concrete bench, according to the technical specifications of the Solar Tree version supplied. Benches in white painted concrete, with second coat of anti-graffiti paint.



Вид светового потока



IP65 vano ottico/IP44 vano batteria



ТЕХНИЧЕСКИЕ ДАННЫЕ

ХАРАКТЕРИСТИКИ

Наименование продукции: Solar Tree

T080600 + T080400 Код: Цвет White/Green Материал: Aluminium Outdoor Окружающая среда: Уличное место контракта: Городская

архитектура

ОПТИКА

Вид светового потока: Direct


РАЗМЕРЫ

Высота: cm 614 cm 441 Диаметр: IK10 Ударопрочность: 960 тест раскаленной проволокой:

ЛАМПЫ ВКЛЮЧЕНЫ В КОМПЛЕКТ

Категория: LED Ватт: Мощность (каждый): 1\/\/ 1 x 10 Количество: Типология: Цветовая температура (К): 6000К

РАЗМЕРЫ





Класс:

Категория: LED 23W Световой поток (lm): 1932lm Типология: **Цветовая температура (К)**: 4300K

LUMINAIR

Watt: 92W+10W 220V-240V Напряжение:


Установка






- 4 celle fotovoltaiche abbinate a 20 LED 4 photovoltaic cells with 20 LEDs each
- 4 Solarpaneele mit jeweils 20 LED
- 4 cellules photovoltaïques associées à 20 LED
- 6 celle fotovoltaiche + dissipatori 6 photovoltaic cells + dissipators
- 6 Solarpaneele und Kühlkörper
- 6 cellules photovoltaïques + dissipateurs
- 10 steli da 1 LED
- 10 "stems" 1 LED each
- 10 Stäble mit jeweils 1 LED 10 tiges d'herbe d'1 LED

Sedute in cemento verniciate Benches in white painted concrete Sitzbank aus weiss lackiertem Stahlbeton Banc en béton verni blanc









ДИАГРАММЫ

Polar curve



Cd/klm

Isolux

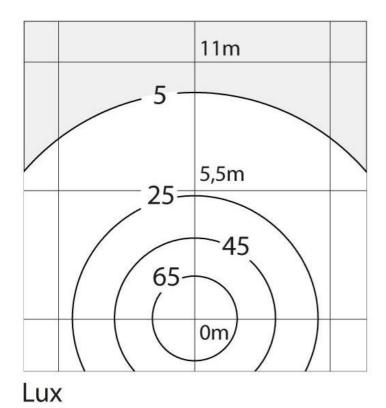

Cartesian diagram

