

ТЕХНИЧЕСКИЕ ДАННЫЕ ПРОДУКТА

Aria Micro - 2,5W 3000K - IP65 - Gray



МАТЕРИАЛЫ:

polycarbonate, tempered glass

ОПИСАНИЕ:

Light fixture with high-performance LED light sources. Wall or ceiling installation. Composed by: frame, body, asymmetrical reflector, fixing springs or housing. Body in injection mould of aluminium. Frame in aluminium. Body and frame are painted with outdoor treatment three stages: nanotechnologies, antioxidant primer, polyester paint. Metalized polycarbonate reflector. Silicone gasket. Protection screen in tempered glass, 3mm-thick. Housing in bend metal. Electrical connection to the ballast by means of a cable with appropriate terminal board supplied with the fixture. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K IP Rating IP65 or IP40. Insulation class III. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

ВЫБРАТЬ

LED

Gray

КОД ПРОДУКТА

NL31019VTK002

Вид светового потока

65

ТЕХНИЧЕСКИЕ ДАННЫЕ


ХАРАКТЕРИСТИКИ

Наименование продукции: Aria Micro - 2,5W 3000K - IP65 - Gray
 Код: NL31019VTK002
 Цвет: Gray
 Материал: polycarbonate, tempered glass
 Серии: Outdoor
 Окружающая среда: Уличное

РАЗМЕРЫ

Длина: см 6
 Высота: см 6
 Глубина встройки: см 3
 Форма отверстия: Квадратная форма
 Вес: kg 0.6

РАЗМЕРЫ

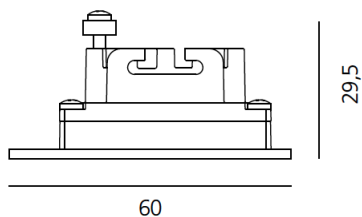

ЦВЕТ



ЛАМПЫ ВКЛЮЧЕНЫ В КОМПЛЕКТ

Категория: LED
 Ватт: 2,5W
 Световой поток (lm): 165lm
 Типология: 1
 Цветовая температура (K): 3000K
 Класс: A

LUMINAIR

Watt: 2,5W

АКСЕССУАРЫ

NO
IMAGE
AVAILABLE

NO
IMAGE
AVAILABLE

NO
IMAGE
AVAILABLE

NO
IMAGE
AVAILABLE

ALIMENT. 5W 350mA IP67
NL11022

ALIMENT. 12W 700mA IP67
NL19024

ALIMENT. 35W 700mA IP67
NL19029

ALIMENT. 8,4W 350mA (indip.)
NL19032

NO
IMAGE
AVAILABLE

NO
IMAGE
AVAILABLE

NO
IMAGE
AVAILABLE

ALIMENT. 9,8W 700mA (indip.)
NL19035

ALIMENT. 20W 700mA (indip.)
NL19036

Cassaforma Aria Micro
NL31020H0