

ТЕХНИЧЕСКИЕ ДАННЫЕ ПРОДУКТА

Falange 9 - 40° 4000K



ДИЗАЙН:

Wilmotte & Industries
2012

МАТЕРИАЛЫ:

Painted aluminum, tempered glass

ОПИСАНИЕ:

Adjustable light fixture with direct emission, with high-performance LED light sources. Ground, wall, eaves installation. 2 sizes: 134 x134, 238 x134 mm. Composed by adjustable lighting unit and support (housing the wiring). Rotation on the base +/-180°, body tilt +/-100° by means of a graduated metal ring allowing an accurate adjustment. Positioning is maintained by means of locking dowels. Body and support in EN AB44100 aluminium, silicone gaskets. Electronic ballast integrated in the body. Silkscreened tempered glass silicone to a secondary frame. Wiring to be carried out by means of plug IP 68.

ВЫБРАТЬ

LED

anthracite grey

КОД ПРОДУКТА

NL3000039W005

Вид светового потока



IP65

ТЕХНИЧЕСКИЕ ДАННЫЕ


ХАРАКТЕРИСТИКИ

Наименование продукции: Falange 9 - 40° 4000K
Код: NL3000039W005
Цвет: anthracite grey
Материал: Painted aluminum, tempered glass
Серии: Nord Light, Outdoor
место контракта: Фасады зданий

РАЗМЕРЫ

Длина: cm 10.5
Ширина: cm 13.4
Высота: cm 21.4

РАЗМЕРЫ

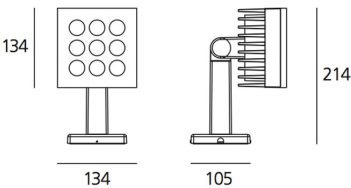

ЛАМПЫ ВКЛЮЧЕНЫ В КОМПЛЕКТ

Категория: LED
Ватт: 20 W
Световой поток (lm): 1248 lm
Количество: 1 x 9
Типология: 1
Цветовая температура (K): 4000 K
Класс: A

ЦВЕТ



LUMINAIR

Watt: 22W
Напряжение: 220-240 Vac